


- ### STANDARD
- 5-1/2" UNIT DEPTH
 - ANNEALED SINGLE STRENGTH GLASS, INSULATED GLASS UNIT
 - UTILE MAHOGANY FRAME & SASH
 - STANDARD 1-1/2" THICK WESTERN RED CEDAR SILLS
 - PRIMED EXTERIOR/ RAW INTERIOR
 - W&C AMESBURY CONCEALED BALANCES
 - FULLY WEATHER SEALED
 - 7/8" S.D.L. MUNTIN GRILL CONFIGURATIONS

- ### SIZING
- R.O.W. = G.W.+10-9/16"
 - U.W. = G.W.+5-1/2"
 - S.O.W.=G.W.+4"
 - O.A.S.W.= G.W.+3-9/16"
 - D.L.O.W.=G.W.-9/16"
 - U.H. = (U.G.H.+L.G.H.)+9-3/32"
 - S.O.H.= (U.G.H.+L.G.H.)+5-15/32"
 - U.S.H.=U.G.H.+3-1/32"
 - L.S.H.=L.G.H.+3-3/4"
 - D.L.O.H.=G.H.-9/16"

- ### STD. HARDWARE
- AMESBURY 186 CONCEALED BALANCES
 - PHELPS SP225BBRE SATIN BRASS PULLEYS
 - A.R.C. #35 NATURAL BRASS CHAIN
 - A.R.C. #10 BRAIDED CORD
 - A.R.C. STACKABLE WEIGHTS

BEACON HILL D.H. W&C

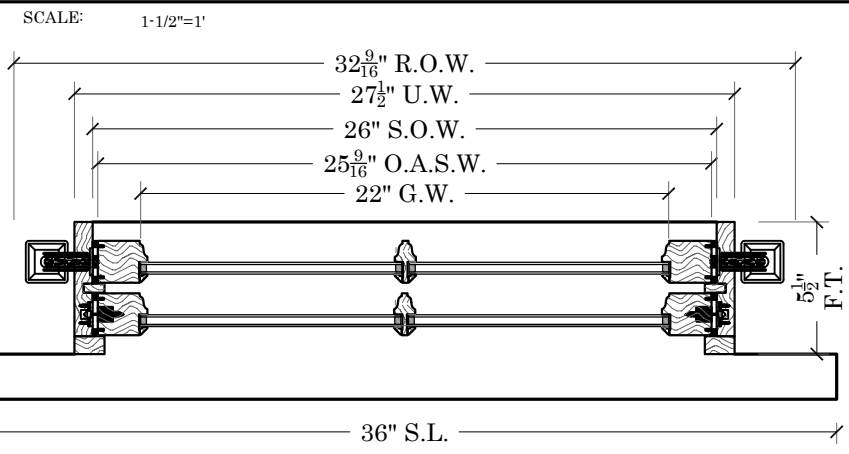

- ### EGRESS INFO.
- MINIMUM UNIT SIZES TO PASS 20"X24" C.O. MA. EGRESS
 - SIZES BASED ON STANDARD 3/4" THICK WINDOW STOOL AND A 1-1/4" MAX HEIGHT SASH LOCK ALLOWANCE
 - 24"X20" UNIT DIMENSIONS 26-1/2"W. X 51"H.
 - 20"X24" UNIT DIMENSIONS 22-1/2"W. X 59"H

- ### OPTIONAL ITEMS
- 2" PINE OR UTILE MAHOGANY INT.EXTENSION JAMBS
 - TEMPERED DOUBLE STRENGTH GLASS UNITS
 - ARGON INSULATION GAP
 - EXTERIOR LOW E I89
 - D.P. RATING GLAZING
 - HISTORIC 1-3/4" THICK WESTERN RED CEDAR SILLS
 - 5/4"X4" OR 4/4"X5' NOMINAL WESTERN RED CEDAR CASING
 - WHITE ROLLED FORM ALUMINUM FULL SCREEN FRAMES
 - CHARCOAL FIBERGLASS SCREEN

BOSTON

SASH & MILLWORK
 667 SPRING STREET
 NORTH DIGHTON, MA. 52764
 PHONE # (508) 880-8808
 FAX # (508) 880-8828
 WWW.BOSTONSASH.COM

B.S. STANDARDS
D.H. W&C OPTION 5

DESCRIPTION:
ELEVATION, SECTIONS & NOTES
BEACON HILL PROFILE

JOB: P.O.# N/A
 DEALER N/A
 CONTRACTOR N/A
 ARCHITECT N/A
 PROJECT MANAGER N/A
 DRAWN BY: **KEITH KUTHAN**
 DATE: **11/11/2015**
 SCALE: **NOTED**
 DWG. NO: **SK2C5.0**
 SHEET: **1 OF 7**