

SASH & MILLWORK
 667 SPRING STREET
 NORTH DIGHTON, MA. 52764
 PHONE # (508) 880-8808
 FAX # (508) 880-8828
 WWW.BOSTONSASH.COM


STANDARD
- 4-5/8" UNIT DEPTH
- S.S.B. GLASS (PUTTY GLAZED)
UTILE MAHOGANY FRAME & SASH
- STANDARD 1-1/2" THICK WESTERN RED CEDAR SILLS
- PRIMED EXTERIOR/ RAW INTERIOR
- AMESBURY CONCEALED BALANCES
- FULLY WEATHER SEALED
- 5/8" T.D.L. MUNTIN GRILL CONFIGURATIONS

SIZING
- U.W. = G.W.+5-5/16"
- S.O.W.=G.W.+3-13/16"
- O.A.S.W.= G.W.+3-3/8"
- D.L.O.W.=G.W.-5/16"
- U.H. = (U.G.H.+L.G.H.)+8-13/32"
- S.O.H.= (U.G.H.+L.G.H.)+5"
- U.S.H.=U.G.H.+2-13/32"
- L.S.H.=L.G.H.+3-15/32"
-D.L.O.H.=G.H.-5/16"


STD. HARDWARE
- AMESBURY 186 CONCEALED BALANCES

EGRESS INFO.
- MINIMUM UNIT SIZES TO PASS 20"X24" C.O. MA. EGRESS
- SIZES BASED ON STANDARD 3/4" THICK WINDOW STOOL
AND A 1-1/4" MAX HEIGHT SASH LOCK ALLOWANCE
- 24"X20" UNIT DIMENSIONS 26-1/2"W. X 51"H.
- 20"X24" UNIT DIMENSIONS 22-1/2"W. X 59"H

OPTIONAL ITEMS
- 2" PINE OR UTILE MAHOGANY INT.EXTENSION JAMBS
- DOUBLE STRENGTH ANNEALED & OR TEMPERED GLASS
- D.P. RATING GLAZING
- HISTORIC 1-3/4" THICK WESTERN RED CEDAR SILLS
- 5/4"X4" OR 4/4"X5' NOMINAL WESTERN RED CEDAR CASING
- WHITE ROLLED FORM ALUMINUM FULL SCREEN FRAMES
- CHARCOAL FIBERGLASS SCREEN

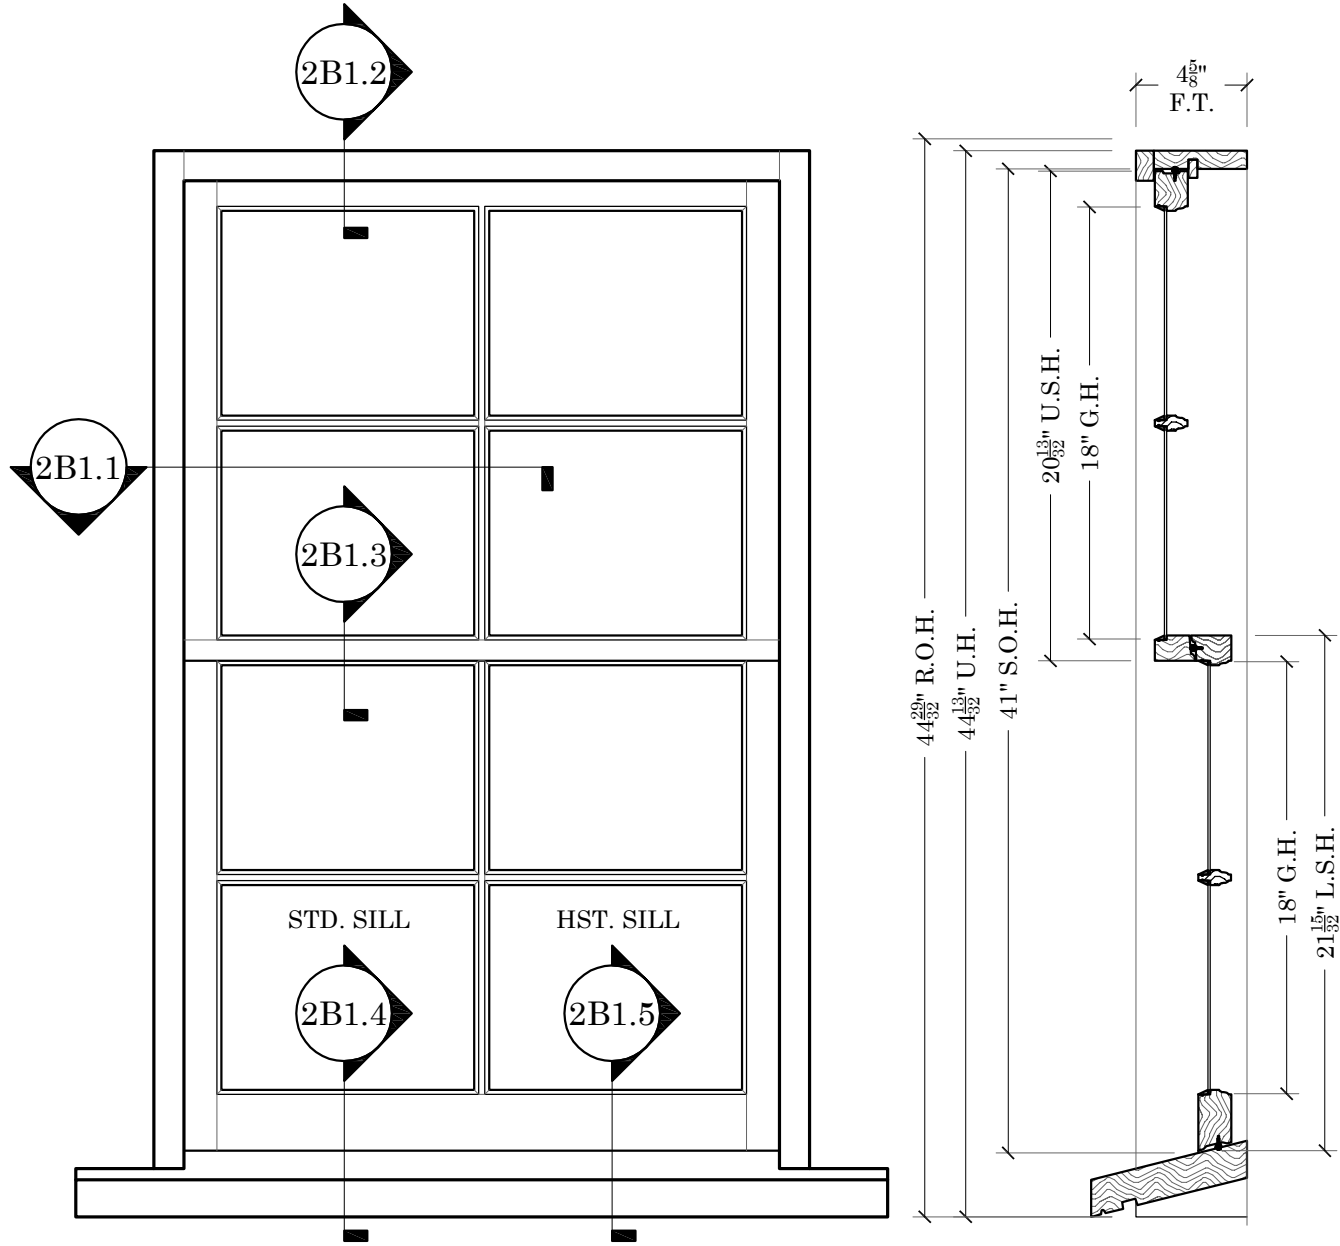

NANTUCKET D.H. B.B.U.

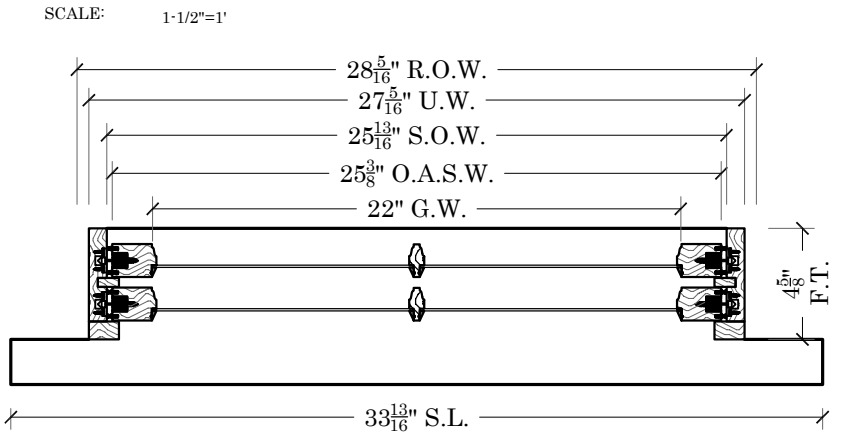

JOB:	B.S. STANDARDS
	D.H. B.B.U. OPTION 1
DESCRIPTION:	ELEVATION, SECTIONS & NOTES NANTUCKET PROFILE

P.O.#	N/A
DEALER	N/A
CONTRACTOR	N/A
ARCHITECT	N/A
PROJECT MANAGER	N/A
DRAWN BY:	KEITH KUTHAN
DATE:	11/11/2015
SCALE:	NOTED
DWG. NO:	SK2B1.0
SHEET:	1 OF 6